



passion for sports grounds


SMG Sportplatzmaschinenbau GmbH

Robert-Bosch-Str. 3, DE - 89269 Vöhringen / Germany

Phone: +49 (0) 7306 96 65 0

Fax: +49 (0) 7306 96 65 50

E-mail: info@smg-machines.com

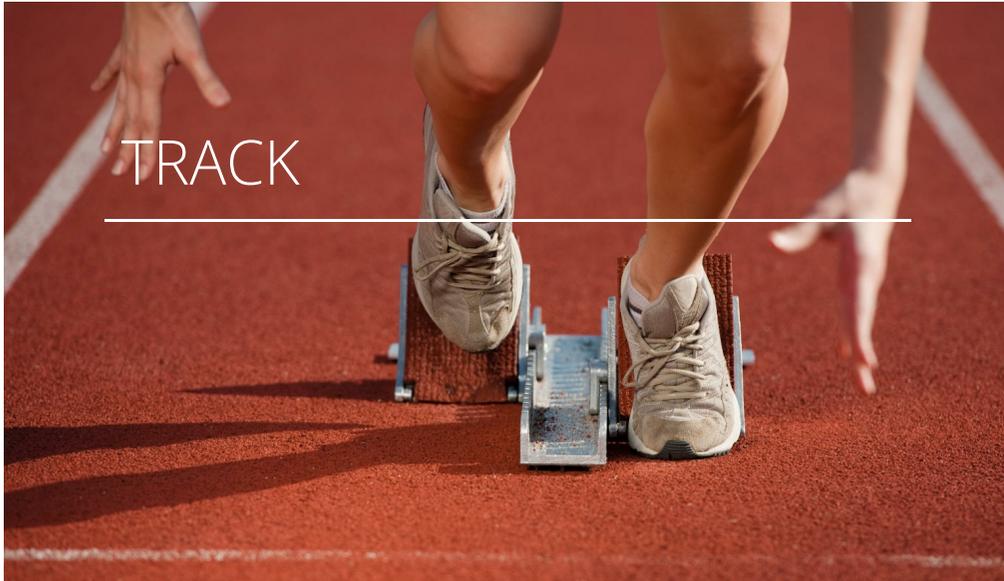

ClearMatic - Redevelopment
CM1800



ClearMatic - Redevelopment

CM1800



Item number/s:

6400353

Mobile plant for the treatment, filtration and sludge dewatering of dirty water when cleaning synthetic sports surfaces.

When cleaning synthetic sports surfaces, a large number of contaminants are released, which can get into the environment via the waste water. These include larger particles such as granulate/fibre abrasions (microplastics) and other undesirable substances from deep-seated soiling. The WashMatic WM800 effectively removes this dirt from nonfilled artificial turf, jogging tracks, multi-purpose playing fields or similar surfaces. The cleaning process is also perfect in terms of the environment, because the waste water from the WM800 cleaning machine goes to the mobile "sister" system ClearMatic CM1800, from where it returns clean and water clear to the closed loop.

The ClearMatic CM1800 is a compact and robust system consisting of 3 tanks with pumps, dosing stations and sophisticated process water control.

Equipment:

- 600 liter waste water tank with integrated entry inlet filter (<5 mm) as well as stirring device and optional tubular heating element
- Storage tank and dosing station for flocculants, optionally cleaning agents, disinfectants, biocides and / or defoamers
- Mixer unit and reactor for the separation of solids / liquids
- Belt filter with tear-proof filter fleece (120 µm) including collecting container with float switch for continuous drying of the dirty water and filtration of solids such as granulate/fibre abrasions (microplastics)
- 300 liter fresh water tank as an additional tank for cleaning the CM1800 or for providing fresh water for operating the WM800
- 100 liter clear water tank with discharge to the sewer or return to the dirty water tank
- Dosing and delivery pumps for particle sizes up to 10 mm

- Sensors for checking turbidity, flow and fill levels
- Central switch box with display for controlling all pumps, valves, belt filters as well as querying and storing of sensor readings
- Frame construction, tanks and all pipes and pumps made of stainless steel

ClearMatic - Redevelopment CM1800


Detail views



ClearMatic CM1800



Waste water tank with integrated entry inlet filter (<5 mm) as well as stirring device

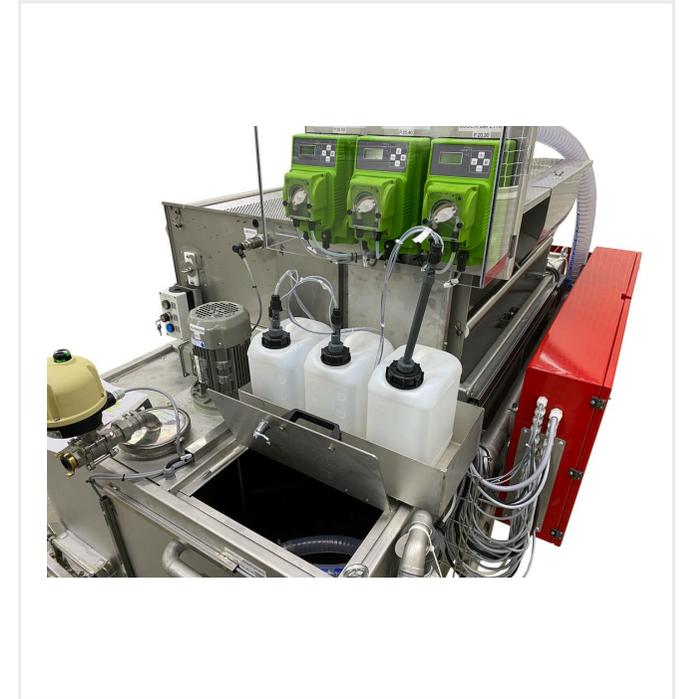

Storage tank and dosing station for flocculants, optionally cleaning agents etc.

ClearMatic - Redevelopment CM1800

Detail views



Belt filter with tear-resistant filter fleece (120 µm) including collecting container with float switch



Sensors for checking turbidity, flow and fill levels



Central switch box with display for controlling all pumps etc.

ClearMatic - Redevelopment

CM1800

Technical information

Drive/power consumption	2,9 kW (8,8 HP) / 3ph. / 400V / 50 – 60 Hz / 17 A
Weight	900 kg
Dimensions	L 2,503 x W 1,596 x H 1,883 mm

Subject to technical changes



passion for sports grounds

SMG Sportplatzmaschinenbau GmbH | Robert-Bosch-Str. 3, DE - 89269 Vöhringen / Germany | Phone: +49 (0) 7306 96 65 0
Fax: +49 (0) 7306 96 65 50 | info@smg-machines.com | www.smg-machines.com